

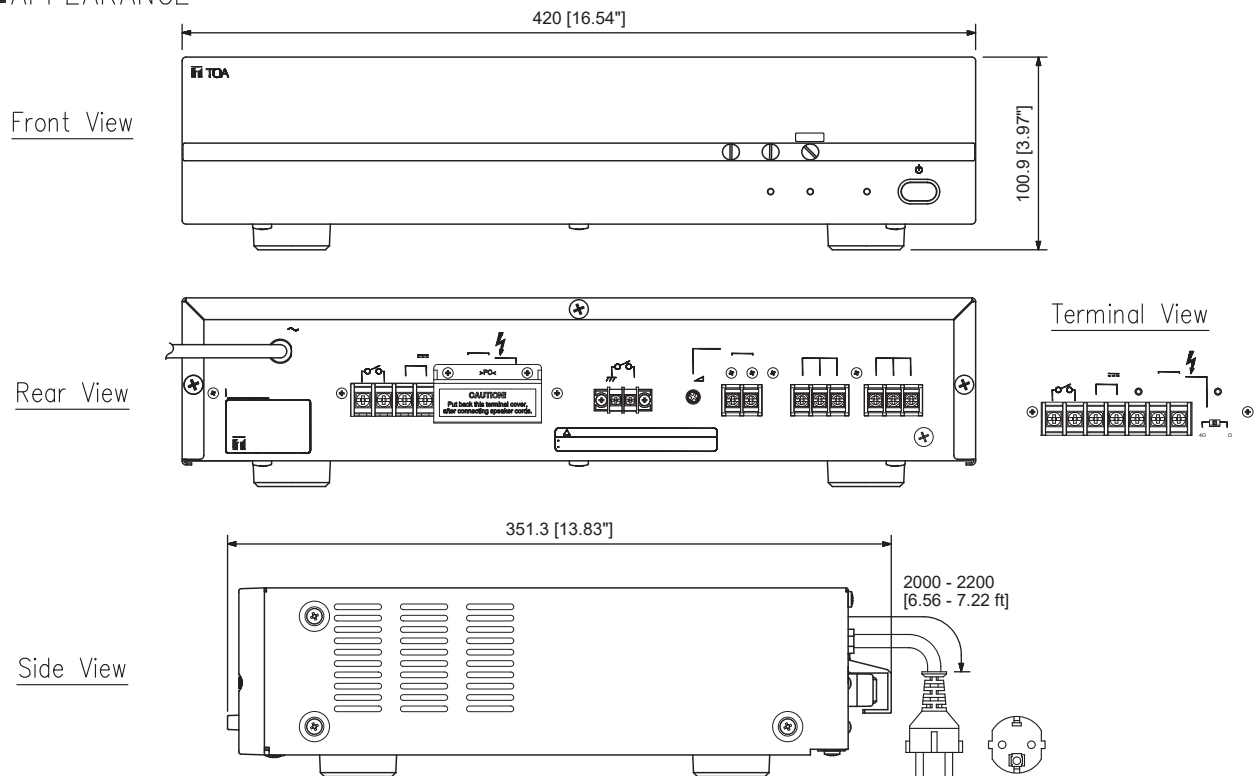
DESCRIPTION

The P-3248D-AS is a high cost-performance booster amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

SPECIFICATIONS

* 0 dB = 1 V

Power Source	100 - 240 V AC ~ 50/60 Hz or 24 V DC
Power Consumption (EN60065)	99 W (AC operation at 1/8 maximum output without clip)
Rated Output	480 W
Input	Line In : 0 dB*, 10 k Ω , balanced, screw terminal 100 V Line In : 40 dB*, 30 k Ω , unbalanced, screw terminal
Output	Speaker Out: Speaker output in screw type terminal Direct Line (selectable): 21 Ω (100 V) or 4 Ω Loop Out : 0 dB*, 10 k Ω , balanced, screw terminal
Control	Remote power control, screw terminal Remote Master volume bypass, screw terminal
S/N Ratio	Over 70 dB
Total Harmonic Distortion	Under 1% at 1 kHz, 1/3 rated power
Frequency Response	50 - 20000 Hz
Tone Control	Bass: \pm 10 dB at 100 Hz Treble: \pm 10 dB at 10 kHz
Indicator	POWER, SIGNAL, PEAK
Operating Temperature	0 °C to +40 °C
Ventilation	Fan Cooling
Finish	Panel: ABS Resin, Black Case: Steel Plate, Black
Dimensions	420 (W) X 100.9 (H) X 351.3 (D) mm (16.54" X 3.97" X 13.83")
Weight	5.2 kg (11.46 lb)

APPEARANCE


UNIT : mm SCALE : 1/4