

■DESCRIPTION

TOA A-260DU-AS is a Mixer Power Amplifier consist of 2 Mic input and 2 AUX input, Its power rated 60W is ideal used for BGM or Paging requiring small power outputs.


■SPECIFICATIONS

Power Source	110 - 220V AC, 50/60 Hz
Rated Output	60 W
Power Consumption (EN60065)	100 W (Rated output), 16W (AC Operation EN60065)
Frequency Response	50 - 20,000 Hz (±3 dB)
Distortion	Less than 1%
Input	MIC 1, 2 : -60 dB(*1) 600 Ω, Unbalanced, Phone Jack AUX 1, 2 : -20 dB(*1) 10 k Ω, Unbalanced, RCA Jack
Output	Speaker : 170Ω (High Impedance, 100 V Line), 4Ω (Low Impedance, 15.5 V) Rec Out : 0 dB(*1) 600 Ω, Unbalanced, RCA Jack
SN Ratio	MIC 1, 2 : More Than 60 dB AUX 1, 2 : More Than 70 dB (JIS-A)
Muting	MIC 1 Mutes other input signals with 0 ~ 30 dB attenuation
Indicator	Power (Green), Signals (Green)
Operating Temperature	0 °C ~ +40 °C
Operating Humidity	35% ~ 80% (No condensation)
Finish	Panel : ABS Resin Black, Hairline Case : Steel Plate Black, Paint
Dimensions	250 (W) X 67.5 (H) X 217.2 (D) mm
Weight	2.6 kg


(*1) 0 dBV = 1 V

■APPEARANCE


Rear View

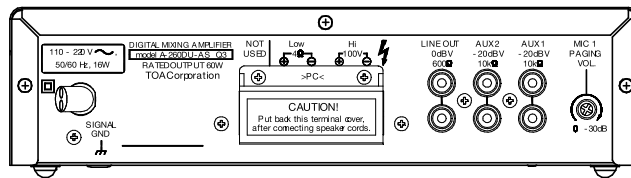

Front View

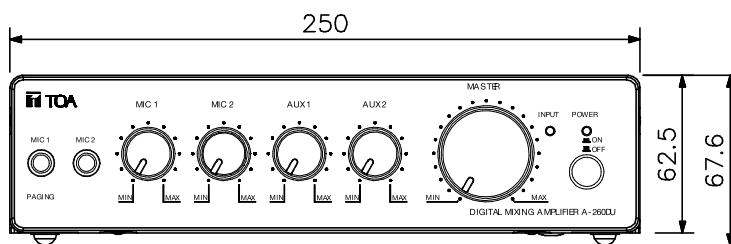

Side View

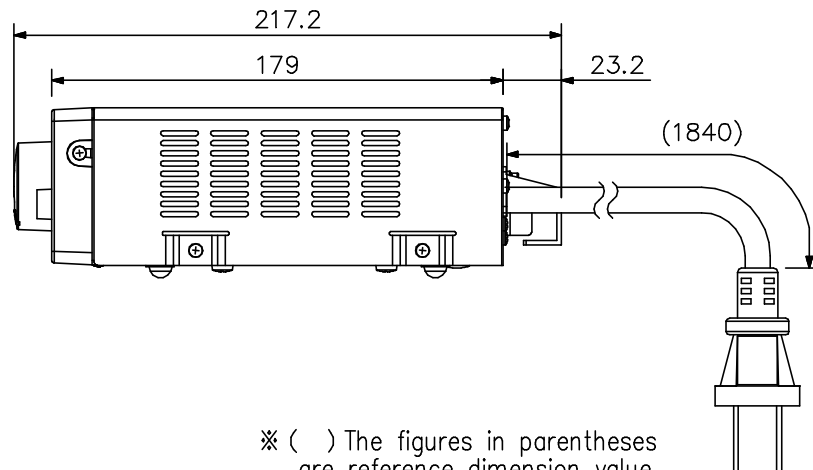

※ () The figures in parentheses are reference dimension value

UNIT : mm SCALE : 1/3